

MIDDLETON SQUARE™



LATTE




This artisanal, hand-formed masonry exudes **sophistication for a fashion-forward design** with subtle texture and neutral tones

MIDDLETON SQUARE™

GLAZED CERAMIC WALL

WALL TILE

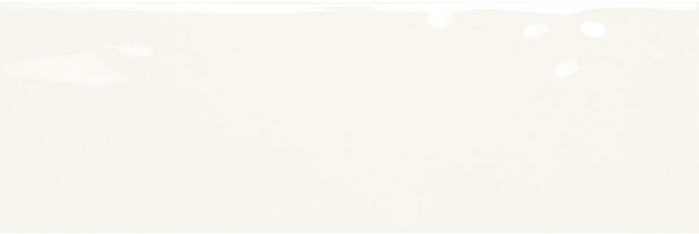

MS40 Oxford White




MS41 Windsor Cream



MS42 Latte



MS43 Urban Mist

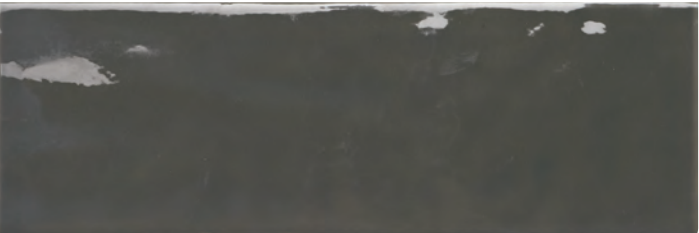

MS44 Steeple Gray



MS45 Black Bean


WALL TILE

USAGE

Floors	Walls	Countertops
	W	



SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	4 x 12 Wall Tile	(4-1/4" x 12-7/8") (10.90 cm x 32.76 cm)	5/16"	10.64	28

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit marazzitile.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed

TRIM

Description	Number	Size	Shape
Wall Bullnose (12 inch side)	S-44C9	4 x 12	

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16" (when rectangular size is used in a staggered brick-joint pattern, overlap should not exceed 33%)	 Low Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	Wall Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	> 120 - 230 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: marazzitile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A1371 standards.

For additional information refer to "Factors to Consider" at: marazzitile.com/Factors



Wall Tile



Post Consumer
Recycled Content



Pre-Consumer
Recycled Content

