

MIDPARK MOSAICS™



SHADOW



Natural stone and multi-surfaced porcelain create striking dimensional wall art using **dazzling combinations of color, texture, and sheen** on an intricate, mesh-mounted mosaic

MIDPARK MOSAICS™

A COLLECTION OF GLAZED PORCELAIN AND STONE MOSAICS

1" RANDOM TRAPEZOID MOSAIC



MP07 Cloud




MP11 Rainstorm



MP08 Sandbox



MP09 Bark

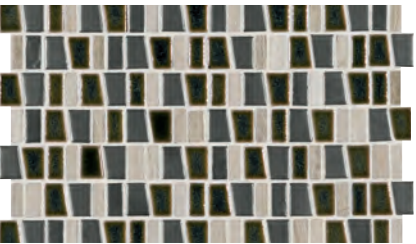

MP10 Shadow

USAGE

Floors	Walls	Countertops
	W	


2" RANDOM SQUARE MOSAIC



MP07 Cloud



MP11 Rainstorm

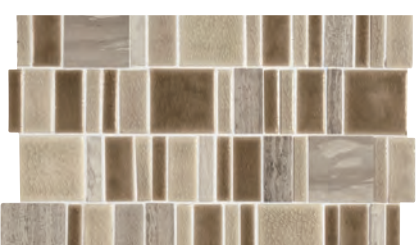

MP08 Sandbox



MP09 Bark



MP10 Shadow

3" RANDOM RECTANGLE MOSAIC



MP07 Cloud



MP11 Rainstorm



MP08 Sandbox



MP09 Bark






MP10 Shadow

DECORATIVE TILE



RAINSTORM

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	2" Random Square Mosaic (Mesh-Mounted)	(13-3/8" x 12-9/16" Sheet) (34.02 cm x 32.02 cm)	5/16"	11.1	10
	3" Random Rectangle Mosaic (Mesh-Mounted)	(12-9/16" x 12" Sheet) (32.02 cm x 30.48 cm)	5/16"	9.8	10
	1" Random Trapezoid Mosaic (Mesh-Mounted)	(12" x 12-9/16" Sheet) (30.60 cm x 32.10 cm)	5/16"	10.3	10

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit marazzitile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Random Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	Mosaic Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 200 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: marazzitile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: marazzitile.com/Factors

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Use of a white latex modified thin-set is recommended for installation.

DECORATIVE TILE



Wall Tile

