

ENTOURAGE™
ALAIR™
GLASS & STONE

Photo features Alair Smoke 2 x 4 Linear Hexagon mosaic on the wall.

LINEAR HEXAGON GLASS & STONE MOSAIC



COTTON AL14




HONEY AL15



DOVE AL16



SLATE AL17

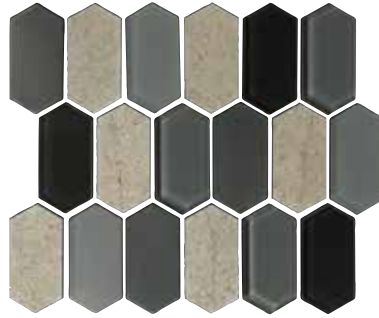


SMOKE AL18



MINT AL19

SIZES



2 x 4
Linear Hexagon
Glass & Stone
Mosaic ■

10-5/8" x 12-3/4" Sheet
(26.99 cm x 32.39 cm Sheet)

THICKNESS
5/16"

SQ. FT./
CARTON

8.50

PIECES/
CARTON

10

■ Mesh-mounted

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:

Mosaic: 1/8"

RELATIVE PRICING: High

SHADE VARIATION



RANDOM
(V4)

PERFORMANCE CHARACTERISTICS

	ASTM#	MOSAIC RESULT*
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 100 lbs.
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

* Test results are for glass tile only.

USAGE

FLOORS	WALLS	COUNTERTOPS

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, refer to p. 294.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

NOTES

For additional information refer to "Factors to Consider" on p. 293.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Since there are variations in all glass products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards.

Use of a white latex modified thin-set is recommended for installation.

Stone is sealed at the factory and should be resealed as part of normal maintenance.

For information on Test Results & Classifications, see p. 294.

For Installation Considerations, Care & Maintenance information, see pp. 295-297.