

Hedron

Decorative (Glazed Ceramic)

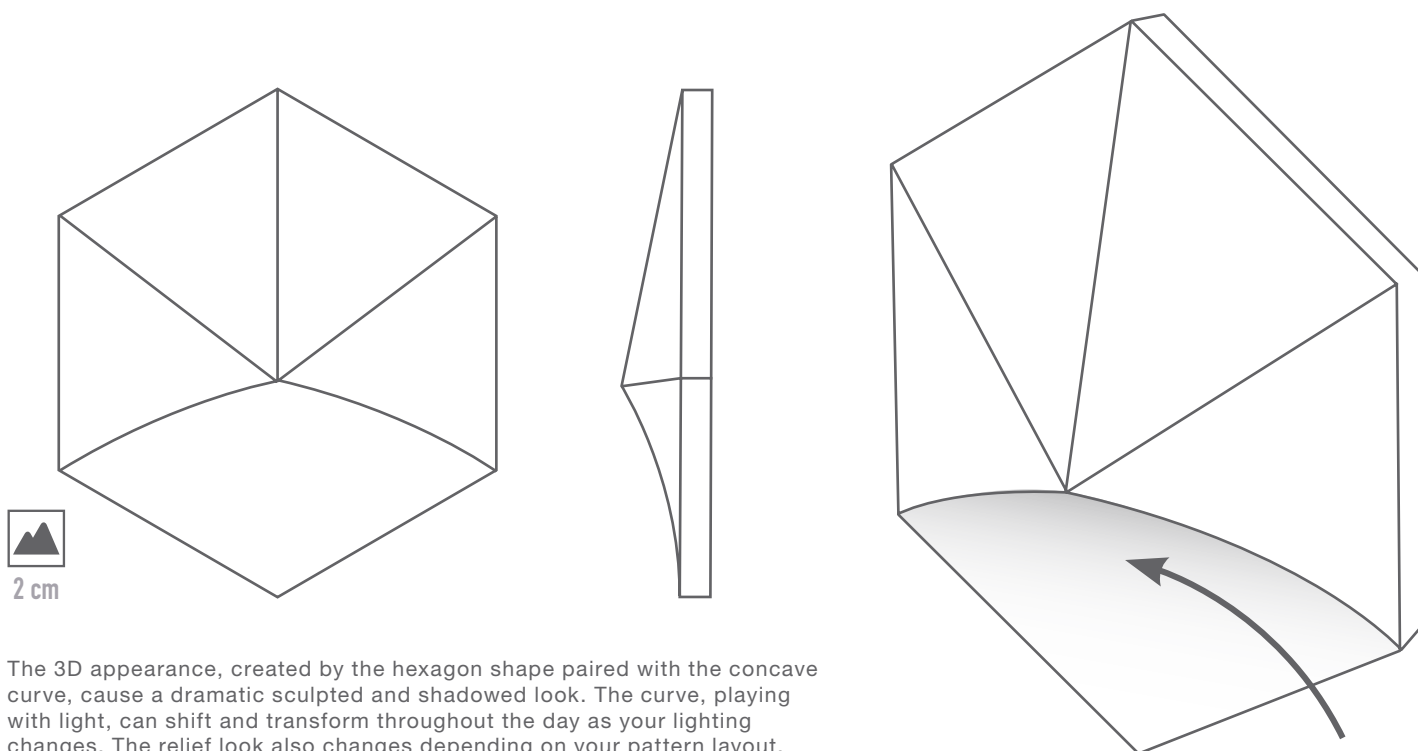


Photo Features 5"x4" Wall Tile in White - Matte. Flat Hexagon Wall Tile Not Available.



Photo Features 5"x4" Wall Tile in Bright White Pearl and Black - Gloss.

Play with Light and Shadows



2 cm

The 3D appearance, created by the hexagon shape paired with the concave curve, cause a dramatic sculpted and shadowed look. The curve, playing with light, can shift and transform throughout the day as your lighting changes. The relief look also changes depending on your pattern layout.

5"x4" Wall Tile



Bright White Pearl - BWP
DECHEDBWP54G - Gloss



White - WHI
DECHEDWHI54G - Gloss




White - WHI
DECHEDWHI54M - Matte



Fog - FOG
DECHEDFOG54G - Gloss




Sky Blue - SKB
DECHEDSKB54G - Gloss

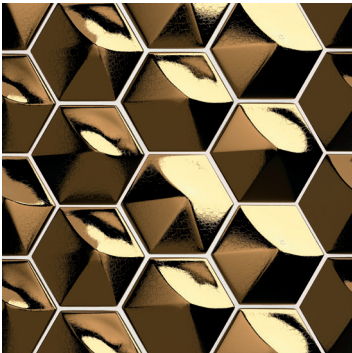

Metallic - MET
DECHEDMET54G - Gloss




Electric Blue - ELB
DECHEDELB54G - Gloss

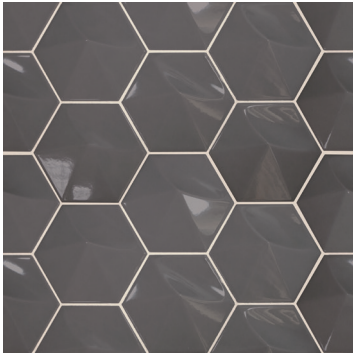

Storm - STO
DECHEDSTO54G - Gloss




Black - BLA
DECHEDBLA54M - Matte

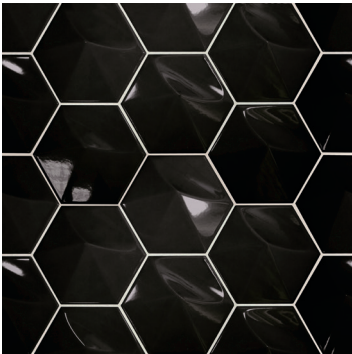

Black - BLA
DECHEDBLA54G - Gloss

Possible Arrangements - Shadow Effect Changes with Different Layouts

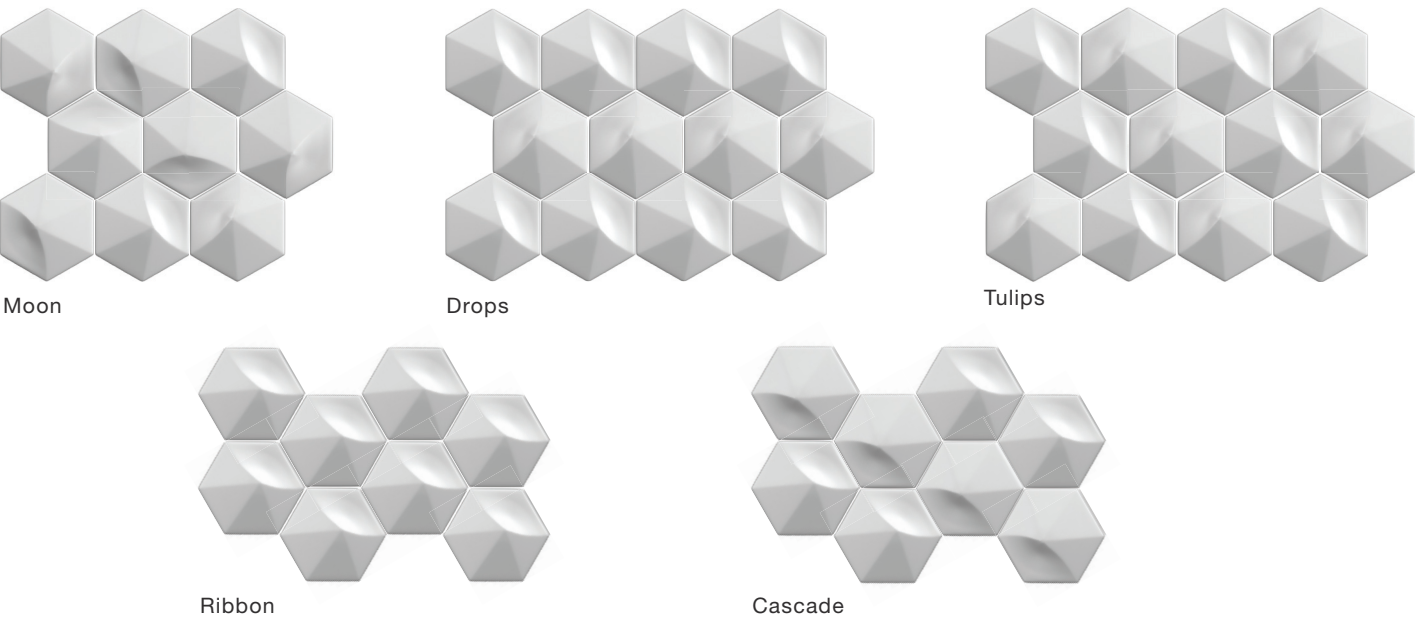


SIZING & PACKAGING

| Type | Shape | Item Code | Size | Description | Pcs / Ctn | Sf / Ctn |
|------|---|--------------|-------|-------------------|-----------|----------|
| Wall |  | DECHED***54G | 5"x4" | Wall Tile - Gloss | 36 | 4.74 |
| |  | DECHED***54M | 5"x4" | Wall Tile - Matte | 36 | 4.74 |

ANSI TECHNICAL SPECIFICATIONS - Electric Blue, Metallic

| | DCOF Acutest | PEI Rating ASTM# C1027 | Frost Resistant ASTM# C1026 | Scratch Resistance MOHS | Breaking Strength ASTM# C648 | Water Absorption ASTM# C373 | Chemical Resistance ASTM# C650 |
|---------|-----------------|------------------------------|-----------------------------------|-------------------------------|------------------------------------|-----------------------------------|--------------------------------------|
| Results | N/A | N/A | N/A | 1 | ≥ 250 lbf | > .1 (Ceramic) | Unaffected |



ANSI TECHNICAL SPECIFICATIONS - All Colors Except Electric Blue & Metallic

| | DCOF Acutest | PEI Rating ASTM# C1027 | Frost Resistant ASTM# C1026 | Scratch Resistance MOHS | Breaking Strength ASTM# C648 | Water Absorption ASTM# C373 | Chemical Resistance ASTM# C650 |
|---------|-----------------|------------------------------|-----------------------------------|-------------------------------|------------------------------------|-----------------------------------|--------------------------------------|
| Results | N/A | N/A | N/A | 3 | ≥ 250 lbf | > .1 (Ceramic) | Unaffected |



APPLICATIONS

| | Floors | Walls | Countertops | Shower Floors | Shower Walls | Pools/Spas |
|------------------|--------|-------|-------------|---------------|----------------|------------|
| Residential | | ● | | | ● Non Metallic | |
| Light Commercial | | ● | | | ● Non Metallic | |
| Commercial | | ● | | | ● Non Metallic | |

LEGEND

- ☒ Product rated for Interior & Exterior use
- ☐ Applications & ANSI Technical Specifications do not apply
- ☐ Product rated for Interior use only
- ☐ Special Order only
- ☐ May be suitable for Exterior Floors

Metallic colors cannot be installed in submerged applications. Products possessing a beveled veneer can only be installed on wall applications. Metallic colors cannot be installed in high-heat areas or steam rooms. Non-metallic colors may be installed near or on the face of high-heat areas, but not inside. Metallic colors cannot be installed in submerged applications. This product cannot be installed in exterior applications, wet areas, and/or high-heat areas. Do not use chlorine, acids, or other harsh chemicals to clean. Use only non-sanded grout with this product. For Metallic colors, all spills must be cleaned immediately to prevent staining.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

MKTTTERDECHED